

+Product Datasheet model uvex i-guard



خصائص المنتج

أحد منتجات مجموعة uvex i-range نظارات السلامة متعددة الاستخدامات 3 في 1 - تسمح بتكييف النظارات وفقاً لمخاطر مكان العمل
توفر العدسة الكبيرة والمسطحة مجال رؤية واسع
يوفر الدرع الجانبي الممتد حماية إضافية من المخاطر
يتميز القناع بإطار وجه ناعمة ومرنة يتكيف مع شكل الوجه، مما يوفر الحماية والراحة. كما أنه يحمي من قطرات أو رذاذ السوائل وجزيئات الغبار الكبيرة
زيادة الحماية من الصدمات
طوق رأس قابل للتعديل لتوفير إغلاق وثبات محكمين
عدسة قوية من البولي كربونات مزودة بتقنية طلاء سوبر فيجن المثبتة من uvex - عدسة مقاومة للضباب و للخدش بشكل دائم
UV400 - حماية بنسبة 100% ضد الأشعة فوق البنفسجية الضارة حتى 400 نانومتر

1. Product Characteristics

- member of the uvex i-range - versatile 3in1 safety eyewear range – allows eyewear to be adapted according to workplace hazards
- large, flat lens delivers unrestricted field of vision
- x-tended sideshield offers additional protection from hazards
- soft, flexible face seal adapts to the wearer providing both protection and comfort. It also protects against droplets or splashes of liquids and large dust particles (markings 3 and 4)
- increased impact protection – marking B
- individually adjustable headband for a perfect fit and secure hold
- robust polycarbonate lens with uvex's proven supravision coating technology – permanent anti-fog and scratch-resistant lens
- UV400 – 100 % protection against dangerous UV radiation up to 400 nm
- metal-free

2. Technical Details Body

Face seal

Material	TPE, recycled
Colour	anthracite

Headband

Material	textile headband
Features	individually adjustable
Colour	blue, anthracite

Headband hooks

Material	PC-PBT
Colour	anthracite

Marking

Manufacturer 's ID code	W
Applicable EN norm	166
Field of use	3 (drops and splashes of liquid) 4 (large dust particles)
Impact resistance	B (120 m/s)
Conformity symbol	CE

3. Technical Details Lens

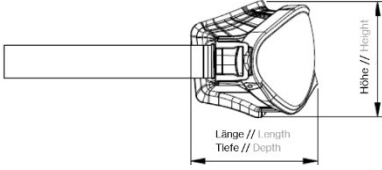




Material	PC
Thickness	2.35 mm at PD
Coating	uvex supravision extreme
Colour	clear
UV protection	UV400

Marking

Filter	2C-1.2 (EN 170)
Manufacturer 's ID code	W
Optical class	1
Impact resistance	B (120 m/s)
Scratch resistance	K
Antifog	N
Conformity symbol	CE
Factory symbol	

4. Logistical Information

Product

Weight	50g		
Dimensions (L x W x B) in approx. mm	 		
	55 x 150 x 60		
	Packing unit 1	Packing unit 2	Packing unit 3
EAN Code	4066853019015	4066853019022	4066853019039
Quantity in pcs.	1	8	128
Dimensions (L x W x H) in approx. mm	 picture only for reference		
	70 x 150 x 70	185 x 290 x 97	600 x 400 x 400
Net weight in approx. g	50	400	6.400
Gross weight in approx. g	64	615	10,740
Country of Origin	Germany		

5. Miscellaneous

Standards	EN 166 + EN 170
PPE Category	Category II



المتحدة لأنظمة السلامة والإطفاء

شارع سليمان النابلسي - العبدلي

077-6060806 06-4656244

Sales@safefire.jo

www.toolsandsafety.shop

