

Product Datasheet model uvex ultravision**المواصفات**

نظارات سلامة كلاسيكية مناسبة لمجموعة واسعة من الاستخدامات
حافة مرنة للوجه تتكيف بشكل طبيعي مع أي شكل للوجه
مساحة داخلية واسعة تتسع للنظارات الطبية
تجاوزيف للإطار لتثبيت الأذرع الجانبية لضمان ملائمة مريحة
نظام تهوية غير مباشر يزيد من دوران الهواء
عصابة رأس قماشية قابلة لتعديل الطول لملائمة آمنة وقابلة لتعديل فردية
عدسة متينة من البولي كربونات مع طلاء Supravision المثبت من uvex
تقنية طلاء دائم مضاد للضباب والخدوش
UV400 - حماية 100% من الأشعة فوق البنفسجية الضارة حتى 400 نانومتر
ميزة مستدامة: يمكن استبدال العدسات عند الحاجة
خالية من المعادن

1. Product Characteristics

- classic safety goggle suitable for a wide range of applications
- flexible face seal naturally moulds to any facial shape
- generous internal volume accommodating prescription spectacles and frame recesses to locate the side arms ensuring a comfortable fit
- indirect ventilation system increases air circulation
- length-adjustable textile headband for a secure fit and individual adaptability
- robust polycarbonate lens with uvex's proven supravision coating technology – permanent anti-fog and scratch-resistant lens
- UV400 – 100% protection against dangerous UV radiation up to 400 nm
- a sustainable benefit: lenses can be replaced when required
- metal-free

2. Technical Details Body

Frame

Material	PVC
Version	indirect ventilation
Colour	transparent grey

Headband

Material	synthetic
Features	individually adjustable
Colour	anthracite, lime

Headband Hooks

Material	PC
Colour	anthracite

Marking

Manufacturer 's ID code	W
Applicable EN norm	166
Field of use	3 (drops and splashes of liquid) 4 (large dust particles)
Impact resistance	B (120 m/s)
Resistance to high speed particles at extremes of temperature	T
Conformity symbol	CE

3. Technical Details Lens

Material	PC
Thickness	2.2 mm at PD
Coating	uvex supravision excellence
Colour	clear
UV protection	UV400
Replacement lens	9301255
Marking	
Filter	2C-1.2 (EN 170)
Manufacturer 's ID code	W
Optical class	1
Impact resistance	B (120 m/s)
Resistance to high speed particles at extremes of temperature	T
Scratch resistance	K
Antifog	N
Conformity symbol	CE
Factory symbol	



المتحدة لأنظمة السلامة والإطفاء

المعرض

شارع سليمان النابلسي - العبدلي

077-6060806 06-4656244

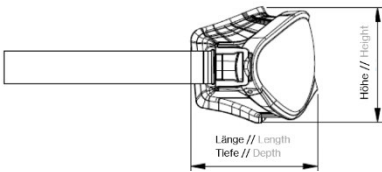

Sales@safefire.jo

www.toolsandsafety.shop



4. Logistical Information

Product

Weight	131g	
Dimensions (L x W x B) in approx. mm	  picture only for reference	
	95 x 196 x 91	
	Packing unit 1	Packing unit 2
EAN Code	4031101067742	4031101711133
Quantity in pcs.	1	90
Dimensions (L x W x H) in approx. mm	 picture only for reference	
	100 x 200 x 91	600 x 400 x 400
Net weight in approx. g	131	11,790
Gross weight in approx. g	149	14,310
Country of Origin	Czech Republic	

5. Miscellaneous

Standards	EN 166 + EN 170
PPE Category	Category II