

Product Datasheet model uvex pheos**خصائص المنتج**

نظارات أمان رياضية وعصرية، بتصميم بدون إطار يسمح بمجال رؤية واسع للغاية توفر الأذرع الجانبية المصممة بشكل مريح مع أطراف ناعمة الملمس ملائمة مريحة وأمنة دون ضغط. جسر الأنف مصمم لراحة تدوم طوال اليوم
عدسة متينة من البولي كربونات مزودة بتقنية طلاء سوبر فيجن المثبتة من uvex - عدسة دائمة مضادة للضباب ومقاومة للخدش
UV400 حماية بنسبة 100% ضد الأشعة فوق البنفسجية الضارة UVA و UVB حتى 400 نانومتر
يوفر غطاء الإطار الاختياري القابل للتثبيت حماية إضافية ضد الجزيئات والأوساخ والغبار
يوفر خيار ربط الرأس تثبيتاً للنظارات في مكانها أثناء العمل فوق الرأس أو في الأماكن الضيقة
يتوافق مع نظام uvex IES
قياس موحد .
خالي من المعادن

1. Product Characteristics

- sporty, timeless safety spectacle, frameless design allowing for an extra-large field of vision
- ergonomically shaped side arms with soft-grip temple ends provide a comfortable, secure fit without pressure
- nose bridge designed for all-day comfort
- robust polycarbonate lens with uvex 's proven supravision coating technology – permanent anti-fog and scratch-resistant lens
- UV400 – 100 % protection against dangerous UVA and UVB radiation up to 400 nm
- optional clip-in frame seal provides extra protection against particles, dirt and dust
- headband option holds eyewear in place during overhead or work in confined spaces
- standard size
- fits the uvex IES system
- metal-free

2. Technical Details Body

Temple

Material	POM/TPE
Colour	black, green

Marking

Manufacturer 's ID code	W
Applicable EN norm	166
Impact resistance	F (45 m/s)
Resistance to high speed particles at extremes of temperature	T
Conformity symbol	CE

3. Technical Details Lens

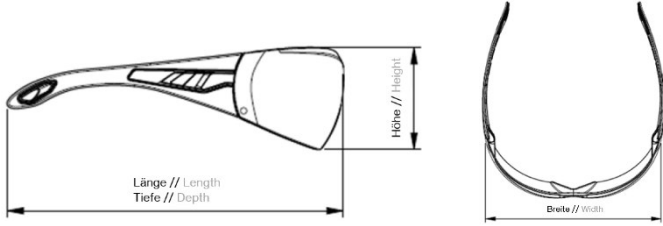



Material	PC
Thickness	2.1 mm at PD
Coating	uvex supravision excellence
Colour	clear
UV protection	UV400

Marking

Filter	2C-1.2 (EN 170)
Manufacturer 's ID code	W
Optical class	1
Impact resistance	F (45 m/s)
Resistance to high speed particles at extremes of temperature	T
Scratch resistance	K
Antifog	N
Conformity symbol	CE
Factory symbol	

4. Logistical Information

Product

Weight	29g		
Dimensions (L x W x B) in approx. mm			
	162 x 145 x 49		
	Packing unit 1	Packing unit 2	Packing unit 3
EAN Code	4031101494036		
Quantity in pcs.	1	10	160
Dimensions (L x W x H) in approx. mm			
	55 x 150 x 60	185 x 290 x 97	600 x 400 x 400
Net weight in approx. g	29	290	4,640
Gross weight in approx. g	43	533	9,430
Country of Origin	Germany		

5. Miscellaneous

Standards	EN 166 + EN 170
PPE Category	Category II



المتحدة لأنظمة السلامة والإطفاء

شارع سليمان النابلسي - العبدلي

077-6060806 06-4656244

Sales@safefire.jo

www.toolsandsafety.shop

